

SYMPHONY

DOUBLE POLE



Application

Self-order, Payment, Digital Signage

Market



Quick Service Restaurants

Purpose

The SYMPHONY self-order terminal is specifically designed to improve every user's experience in the QSR industry! The self-order terminal is easy to install, easy to clean, easy to refill receipts, etc. The SYMPHONY self-order terminal is the high-quality kiosk that puts every user first. From burger-ordering customer up till kiosk service technician, every user counts!

SYMPHONY DOUBLE

Dimensions

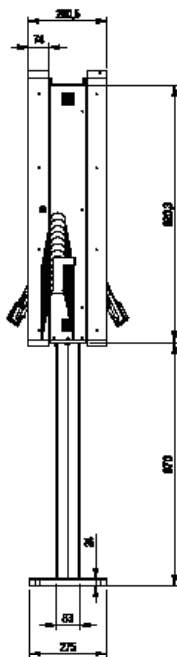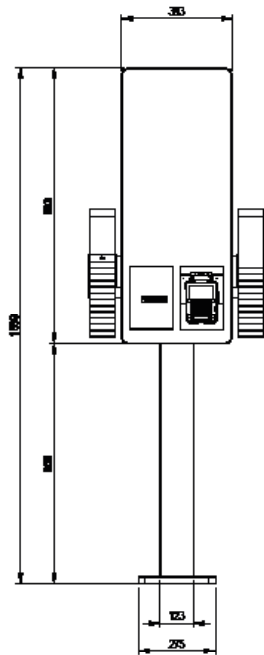

Product specs

Type	Specification
Power supply	230 VAC - 50/60Hz internally
	Wire gauge: 1.5mm ² - 2.5mm ²
Power consumption	Typical: 100W
	Maximum: 200W
Ingress Protection	IP20
Operating temperature	5°C up to 35°C
Storage temperature	-10°C up to 50°C
Humidity	20% up to 80% non-condensing
Weight*	71.3 kg

Hardware options

Type	Specification
Screen	Pan Oston 27" - Full HD 16:9 PCAP
	Windows 10 NUC Celeron
PC	Android 11 Giada DN74
	Others on request
Printer	Epson TM-M30III
Scanner	Newland FM3080 FM3281
LED Controller	Pan Oston BrightLight LED controller
Pin & Chip	CCV A35 Q30 Pad Next
	Ingenico IPP 320-350 Lane/5000
	Verifone P400 V400C VX 820
	Worldline Saturn 1000F2
	Others on request

Product options

Type	Description
Mounting options	Fixed to floor - Using bolts
	Fixed to floor - Using adhesive - Additional 600 x 600 footplate
	Free standing - No bolts/adhesive - Additional 800 x 800 footplate
Power / UTP supply	From floor
	From ceiling - Max. ceiling height = 2840mm If ceiling is higher, additional power poles need to be supplied
Accessories	2x Table Tent Holder
	2x Storm Interface - AudioNav
Colour scheme	Body - Every RAL colour possible
	Ring - Every RAL colour possible

*Depending on configuration and accessories

Pan Oston B.V.

Address Hertzstraat 1
8102 PK Raalte
The Netherlands

P.O. Box P.O. Box 222
8100 AE Raalte
The Netherlands

Phone +31572 3577 55

Email info@panoston.nl

Website panoston.nl